



I-87028VW-G I-87028VW-20V-G

8-channel Isolated Voltage Output Module

Features

- I-87028VW: 0-10 V Voltage Output
- I-87028VW-20V: 0-20 V Voltage Output
- 8-channel Voltage Output
- 2 kV Channel-to-Channel Isolation
- RF Immunity
- Short Circuit Protection
- Configurable Power-on Value Settings
- Configurable Safe Value Settings
- 4 kV ESD Protection
- Wide Operating Temperature Range: -25 ~ +75°C



Introduction

The I-87028VW and I-87028VW-20V are 8-channel voltage output modules that feature 2000 VDC channel-to-channel isolation, and provides for 4 kV ESD protection and 2000 VDC intra-module isolation. Options for configuring power-on and safe values are also included.

Applications

- Building Automation
- Machine Automation
- Remote Diagnosis
- Factory Automation
- Remote Maintenance
- Testing Equipment


System Specifications

Model	I-87028VW	I-87028VW-20V
Communication		
Interface	RS-485	
Format	N, 8, 1	
Baud Rate	1200 to 115200 bps	
Protocol	DCON	
Dual Watchdog	Yes, Module (1.6 Seconds), Communication (Programmable)	
LED Indicators/Display		
System LED Indicators	Yes, 1 as Power/Communication Indicator	
I/O LED Indicators	-	
Isolation		
Intra-module Isolation, Field-to-Logic	2000 VDC	
EMS Protection		
ESD (IEC 61000-4-2)	±4 kV Contact for each Terminal ±8 kV Air for Random Point	
RS Immunity (IEC 61000-4-3)	-	
Power		
Power Consumption	4 W Max.	
Mechanical		
Dimensions (L × W × H)	115 mm × 30 mm × 102 mm	
Environment		
Operating Temperature	-25 ~ +75°C	
Storage Temperature	-40 ~ +85°C	
Humidity	10 ~ 95% RH, Non-condensing	


I/O Specifications

Model	I-87028VW	I-87028VW-20V
Analog Output		
Channels	8	
Current Output Wiring	-	
Range	0 ~ +10 VDC	0 ~ +20 VDC
Resolution	12-bit	
Accuracy	±0.15% of FSR	
Zero Drift	±0.2 μV/°C	
Span Drift	±25 ppm/°C	
DA Output Response Time	10 ms per channel	
Programmable Output Slope	Voltage	0.0625 ~ 512 V/Second
Output Capacity	10 V @ 10 mA	20 V @ 5 mA
Channel-to-Channel Isolation	Yes, 2 kV	
Open Wire Detection	-	
Short Circuit Protection	Yes	
Individual Channel Configuration	Yes	
Power-on Value	Yes	
Safe Value	Yes	


Internal I/O Structure

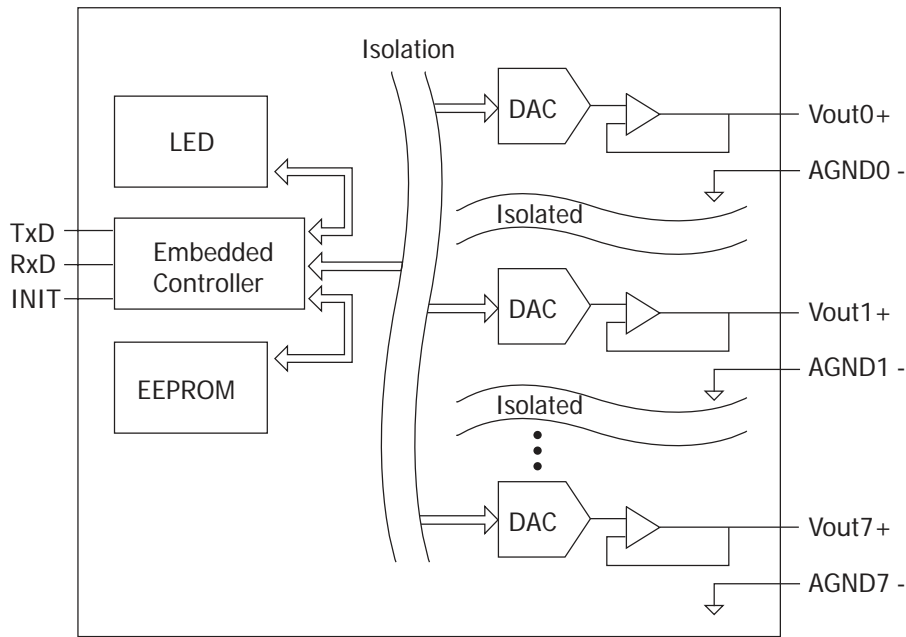


Wire Connections

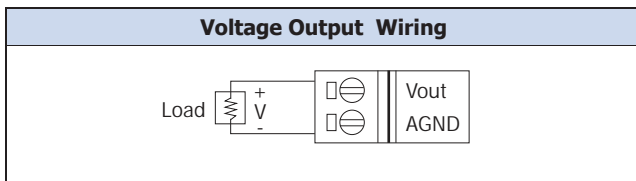


Pin Assignments

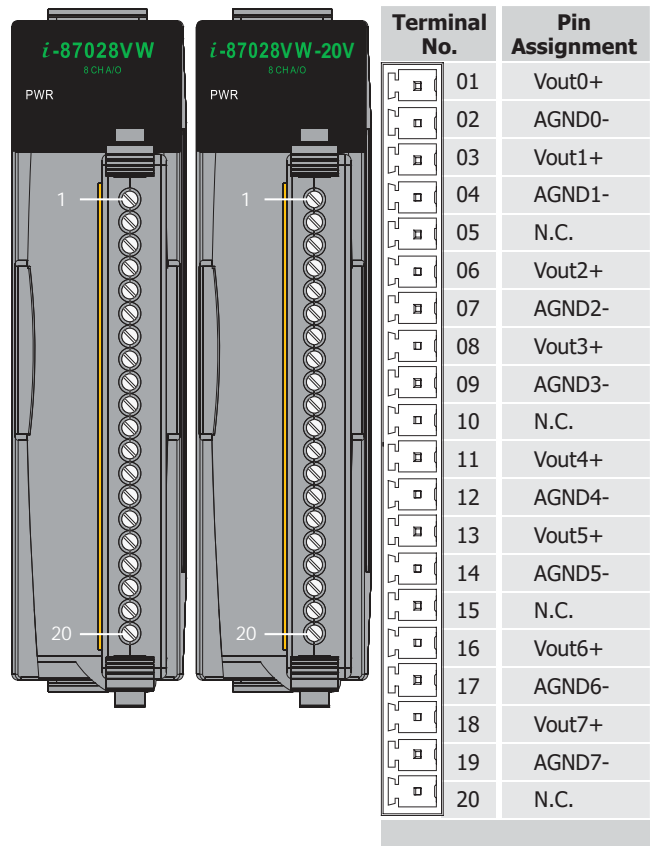

Dimensions (Units: mm)

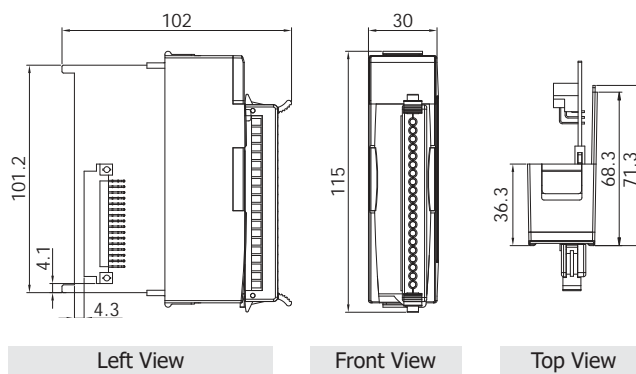

Accessories

	SG-770 CR	7-channel Differential or 14-channel Single-ended Surge Protector (RoHS)
---	-----------	--

Ordering Information

I-87028VW-G CR	8-channel 12-bit Channel-to-Channel Isolated Voltage Output Module (0 ~ +10 VDC) (Gray Cover) (RoHS)
I-87028VW-20V-G CR	8-channel 12-bit Channel-to-Channel Isolated Voltage Output Module (0 ~ +20 VDC) (Gray Cover) (RoHS)