



WF-2026

Wi-Fi I/O Module with 5-ch AI, 2-ch AO, 2-ch DI and 3-ch DO
(Asia Only)

Features

- Multifunction (5-AI, 2-AO, 2-DI and 3-DO)
- Individual Channel Configuration
- Jumper Selectable Voltage or Current Input/Output
- Configurable Power-on and Safe Value Settings
- Compatible with IEEE 802.11b/g standards
- Support WEP, WPA and WPA2 wireless encryption
- Support Modbus/TCP and UDP protocols
- Support DHCP network configuration
- Support DO/AO power on value & safe value mechanism
- Overload and Short Circuit Protection for Digital Output
- 240 Vrms Overvoltage Protection for Voltage Input
- ±4 kV Contact ESD Protection
- Built-in Watchdog



Introduction

The WF-2026 is a multifunction module with Wi-Fi interface that includes 5 analog input channels, 2 analog output channels, 2 digital input channels and 3 digital output channels. It provides a programmable input range on all analog input (± 150 mV, ± 500 mV, ± 1 V, ± 5 V, ± 10 V, ± 20 mA or $0 \sim +20$ mA) and output range on all analog output (12-bit at ± 5 V, ± 10 V, $0 \sim +20$ mA or $+4 \sim +20$ mA). Each analog input and output channel can be configured for an individual range and provides a high overvoltage protection of 240 Vrms. Analog Input and output can be jumper selectable as either voltage or current. With the popularity of 802.11 network infrastructure, the WF-2026 makes an easy way to incorporate wireless connectivity into monitoring and control systems. The WF-2026 also supports Modbus/TCP and UDP protocols and the network encryption configuration, which makes perfect integration to SCADA software and offer easy and safe access for users from anytime and anywhere.

System Specifications

Isolation	
Intra-module Isolation	Power: 3000 Vdc DO: 3750 Vdc DI: 3750 Vdc
Wi-Fi	
Transmission Range	50 meters (LOS)
Standards	IEEE 802.11 b/g (non-RevB version) IEEE 802.11 b/g/n (RevB version)
Receive Sensitivity	-83 dBm @ 11 Mbps (non-RevB version) -93 dBm @ 11 Mbps (RevB version)
Output Power	8 dBm @ 11 Mbps (non-RevB version) 14 dBm @ 11 Mbps (RevB version)
Mode	Infrastructure & Ad-hoc (non-RevB version) Infrastructure & Limit-AP (RevB version)
Encryption	WEP, WPA and WPA2
Antenna	5 dBi (Omni-Directional)
Power	
Input Range	+10 Vdc ~ +30 Vdc
Consumption	2.2 W
Mechanical	
Dimensions (W x L x H)	33 mm x 127 mm x 107 mm (Without antenna)
Installation	DIN-Rail Mounting
Environmental	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-30 ~ +80 °C
Humidity	10 ~ 90% RH, Non-condensing

I/O Specifications

Analog Input	
Channels	5 (Differential)
Type	Voltage, Current
Range	Voltage
	±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V
Impedance	0 ~ +20 mA, +4 ~ +20 mA, ±20 mA (Jumper Selectable)
	12-bit
Resolution	16-bit
Accuracy	±0.1% of FSR
Sampling Rate	10 Hz (Total)
Input	Voltage
Impedance	2 MΩ
	Current
Common Mode Rejection	86 dB Min.
Normal Mode Rejection	100 dB
Overvoltage Protection	240 Vrms
Overcurrent Protection	Yes, 50 mA @ 110 Vdc
Individual Channel Configuration	Yes
Zero Drift	±20 µV/°C
Span Drift	±25 ppm/°C
Analog Output	
Channels	2
Type	Voltage
	+0 ~ +5 Vdc, +0 ~ +10 Vdc, ±5 Vdc, ±10 Vdc
Resolution	Current
	+0 ~ +20 mA, +4 ~ +20 mA (Jumper Selectable)
Accuracy	12-bit
Voltage Output Capability	±0.1% of FSR
Power on Value	10 Vdc @ 20 mA
Safe Value	Yes, Programmable
Digital Input/Counter	
Channels	2
Type	Dry Contact: Source
Contact	ON Voltage Level
	Close to GND
OFF Voltage Level	Open
Digital Output	
Channels	3
Sink/Source (NPN/PNP)	Sink (NPN)
Load Voltage	+3.5 ~ +50 V
Max. Load Current	700 mA per channel
Overvoltage Protection	60 Vdc
Short-Circuit Protection	Yes
Power on Value	Yes, Programmable
Safe Value	Yes, Programmable

Applications




Wire Connections

Voltage Input	Current Input	
mV/V J1~J5 Default	mA J1~J5	
Voltage Output	Current Output	
Load VOx+ VOx- JP1/JP2 Default	Load VOx+ VOx- JP3/JP4	
Digital Input	ON State Readback as 1	OFF State Readback as 0
Dry Contact (Source)		
Digital Output	ON State Readback as 1	OFF State Readback as 0
Open Collector (Sink)	3.5 ~ 50 VDC	1 VDC Max.

Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
VIO-	20	VI0+
VI1-	18	VI1+
VI2-	16	VI2+
VI3-	14	VI3+
VI4-	12	VI4+
VO0-	10	VO0+
VO1-	08	VO1+
DIO	06	DO0
DI1	04	DO1
DGND	02	DO2

Dimensions (Units: mm)

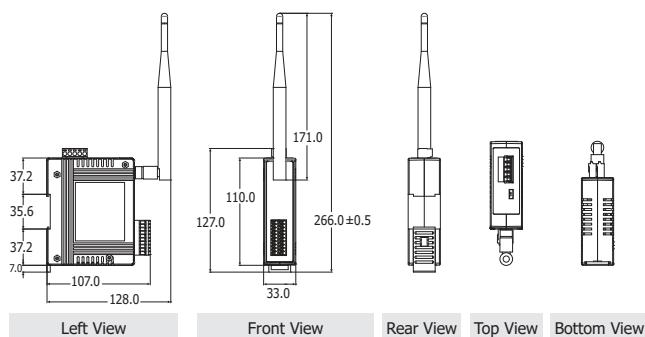

Ordering Information

WF-2026 CR	Wi-Fi I/O Module with 5-ch AI, 2-ch AO, 2-ch DI and 3-ch DO (Asia Only) (RoHS) Includes ANT-124-05 Antenna and CA-0910 Cable
------------	---

Accessories

	3S001-1 CR	Antenna Extension Cable, RG58A/U, RP-SMA Male to RP-SMA Female, 1 M (RoHS)
	3S003-1 CR	Antenna Extension Cable, RG58A/U, RP-SMA Male to RP-SMA Female, 3 M (RoHS)
	3S005-1 CR	Antenna Extension Cable, RG58A/U, RP-SMA Male to RP-SMA Female, 5 M (RoHS)
	3S008-1 CR	Antenna Extension Cable, RG58A/U, RP-SMA Male to RP-SMA Female, 8 M (RoHS)
	ANT-8 CR	8 dBi, 2.4 GHz omni-directional antenna (RP SMA Male Plug) (RoHS)
	ANT-15 CR	15 dBi, 2.4 GHz omni-directional antenna (RP SMA Male Plug) (RoHS)
	ANT-15YG-1 CR	15 dBi, 2.4 GHz directional yagi antenna (RP SMA Male Plug) (RoHS) Includes 3S004 Cable (HDF 200 cable, N type male to RP-SMA male, 1 M)
	ANT-18 CR	18 dBi, 2.4 GHz directional panel antenna (RP SMA Male Plug) (RoHS)
	ANT-21 CR	21 dBi, 2.4 GHz directional grid antenna (RP SMA Male Plug) (RoHS)
	ANT-124-03 CR	3 dBi, 2.4 GHz omni-directional antenna (RP SMA Male Plug) (RoHS)