



XV511i

4-channel RS-485 I/O Expansion Board
(For UA-2241M/WP-2241M-CE7/LP-2241M)

Introduction

The XV511i Provides 4 Channel Isolation RS-485 Expansion for UA-2241M/WP-2241M-CE7 and LP-2241M.

4KV ESD protection and Isolation RS-485 Port, quickly and easily expand the RS-485 communication interface.

Specifications

COM Ports	
Ports	4 x RS-485
Baud Rate	921600 bps Max.
Power	
Consumption	0.74 W
Mechanical	
Dimensions (mm)	66 mm x 82 mm x 14 mm (W x L x H)
Mechanical	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-30 ~ +80 °C
Humidity	10 ~ 90% RH, Non-condensing

Note1: XV511i Supports UA-2241M/WP-2241M-CE7/LP-2241M Only.
Note2: XV511i model DO NOT support the UA-2241MX-4GE/4GC model, please do not buy it as an optional board.

Ordering Information


XV511i CR	4-channel RS-485 I/O Expansion Board (RoHS)
------------------	---

Features

- 4 Port RS-485 Expansion
- Baud 921600 bps (MAX) supports



Pin Assignments

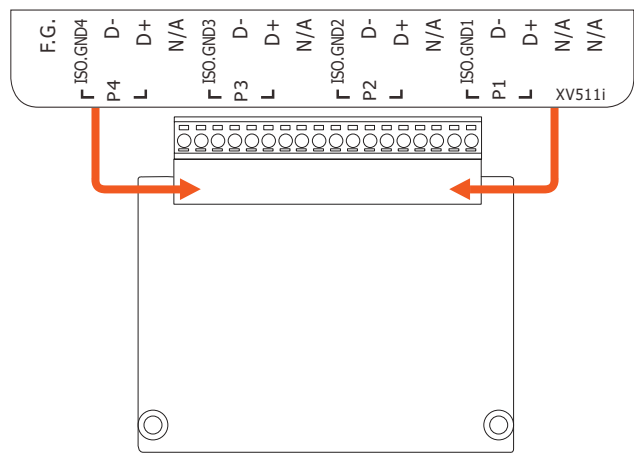

Internal I/O Structure

