



XW514

8-port Non-Isolated RS-485 Expansion Board

Features

- 4 Port RS-485 Expansion
- Baud 115200 bps (Max) supports



Introduction


XW514 is a RS-485 port expansion board for use with uPAC-50xx and WP-51xx series controllers. XW514 provides 8 RS-485 serial ports that have 128-byte FIFO buffers and support communication speeds up to 115,200 bps.

The serial communication modules are designed for use with intelligent devices like bar code readers, intelligent sensors, instrumentation equipment, computers, and almost any device with an RS-485 port.

Specifications

| COM Ports | |
|-----------------------|-----------------------------------|
| Ports | 8 x RS-485 |
| Baud Rate | 115200 bps Max. |
| Parity | None, Even, Odd, Mark, Space |
| Data Bit | 5, 6, 7, 8 |
| Stop Bit | 1, 1.5, 2 |
| FIFO Size | 128 bytes |
| Power | |
| Consumption | 0.6 W |
| Mechanical | |
| Dimensions (mm) | 66 mm x 82 mm x 13 mm (W x L x H) |
| Environmental | |
| Operating Temperature | -25 ~ +75 °C |
| Storage Temperature | -30 °C ~ +75 °C |
| Humidity | 10 ~ 95% RH, Non-condensing |

Pin Assignments

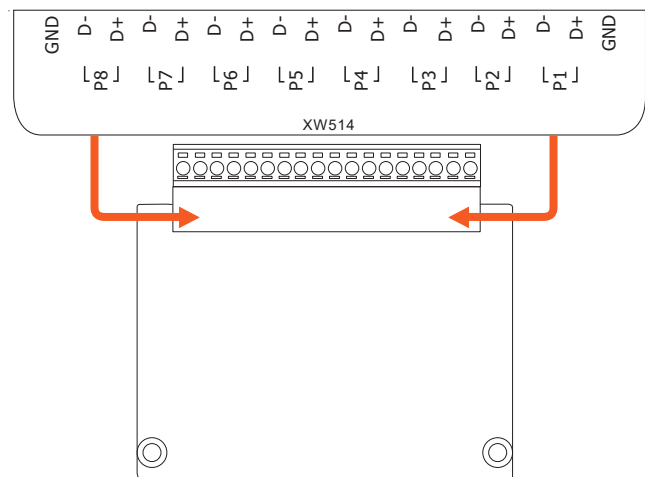

Ordering Information

| | |
|-----------------|---|
| XW514 CR | 8-port Non-Isolated RS-485 Expansion Board (RoHS) |
|-----------------|---|