



## I-8112iW-G

2-port Isolated RS-232 Module

### Features

- Serial Port with +/-4 kV ESD Protection
- Baud Rate of up to 115200 bps
- 2500 Vdc Isolation
- Internal 128-byte Hardware FIFO for each Port
- LED Indicators for TxD, RxD and Power Status



### Introduction

The I-8112iW-G provides 2 isolated RS-232 serial ports. It is equipped with a 128-byte hardware FIFO for each port and offers speeds up to 115.2 kbps with support for full-duplex communication.

In the harsh industrial environment, the onboard ESD protection devices can divert this potentially damaging charge away from sensitive circuitry and protect the I-8112iW from permanent damage.

The serial communication modules are designed for use with intelligent devices like bar code readers, serial printers, intelligent sensors, instrumentation equipment, computers, and almost any device with an RS-232 port.

### Specifications


LED Indicators/Display	
Power	1 LED
TxD	2 LEDs
RxD	2 LEDs
Isolation	
Intra-module Isolation, Field-to-Logic	2500 VDC
EMS Protection	
ESD (IEC 61000-4-2)	±4 kV Contact for each Terminal
Power	
Power Consumption	1.5 W
Mechanical	
Dimensions (W × L × H)	31 mm x 114 mm x 86 mm
Environment	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-40 ~ +85 °C
Humidity	10 ~ 90% RH, Non-condensing

COM Ports	
Ports	2 x RS-232
Baud Rate	115200 bps Max.
Parity	None, Even, Odd, Mark, Space
Data Bit	5, 6, 7, 8
Stop Bit	1, 1.5, 2
FIFO Size	Internal 128 bytes for each port


## Wire Connections

DTE Device (Computer)		DB9	DTE to DCE Connections		DCE Device (Modem)		DB9
Pin#	DB9	RS-232 Signal Names	Signal Direction		Pin#	DB9	RS-232 Signal Names
#1	Carrier Detector	DCD	←	→	#1	Carrier Detector	DCD
#2	Receive Data	RxD	←	→	#2	Transmit Data	TxD
#3	Transmit Data	TxD	→	←	#3	Receive Data	RxD
#4	Data Terminal Ready	DTR	→	←	#4	Data Set Ready	DSR
#5	Signal Ground/Common (SG)	GND	→	←	#5	Signal Ground/Common (SG)	GND
#6	Data Set Ready	DSR	←	→	#6	Data Terminal Ready	DTR
#7	Request to Send	RTS	→	←	#7	Clear to Send	CTS
#8	Clear to Send	CTS	←	→	#8	Request to Send	RTS
#9	Ring Indicator	RI	←	→	#9	Ring Indicator	RI
Soldered to DB9 Metal-Shield		FGND	←	→	Soldered to DB9 Metal-Shield		FGND

### 3-wire RS-232 Wiring

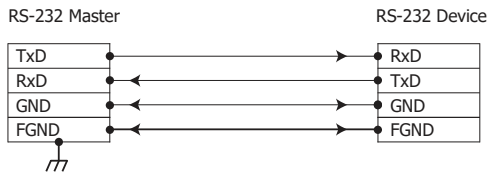

## Dimensions (Units: mm)

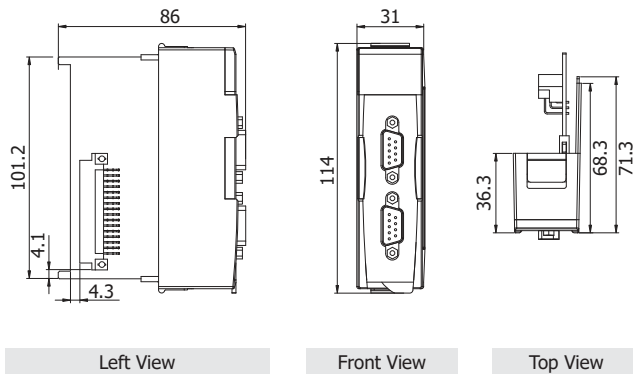

## Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
GND1	05	09 RI1
DTR1	04	08 CTS1
TxD1	03	07 RTS1
RxD1	02	06 DSR1
DCD1	01	
Port1 9-pin Male D-Sub Connector		

Pin Assignment	Terminal No.	Pin Assignment
GND2	05	09 RI1
DTR2	04	08 CTS2
TxD2	03	07 RTS2
RxD2	02	06 DSR2
DCD2	01	
Port2 9-pin Male D-Sub Connector		

## Ordering Information

<b>I-8112iW-G CR</b>	2-port Isolated RS-232 Module (Gray Cover) (RoHS)
----------------------	---

## Accessories

	CA-0915 9-Pin Male-Female D-Sub Cable, 1.5 m
--	--