


Features

- 21.5" TFT-LCD
- Intel Celeron Processor N2930
- SUS 316 Stainless Steel
- Total IP66 Grade with M12 Waterproof Connector
- Variety of IO applications
- Wide range DC 9~36V Power Input
- Support Panel Mount & VESA Mount
- Support Projected Capacitive Touch
- Full Flat Bezel and Fanless Design
- ATEX/IECEX Zone2, Zone22 and C1D2/C2D2/C3 Certified

Specifications

| System | |
|--------------------------------|---|
| CPU | Onboard Intel Celeron N2930 Processor (2M Cache, 1.83GHz) |
| System Chipset | SoC |
| Memory | Onboard 4GB/8GB DDR3L 1333MHz |
| IO Port | |
| USB | 1 x M12 8-pin for 2 x USB 2.0 with waterproof cover and chain |
| Serial / Parallel | 1 x M12 8-pin for COM1, RS-232/422/485, default RS-232, with waterproof cover and chain |
| LAN | 2 x M12 8-pin for LAN with waterproof cover and chain |
| Graph | 1 x M12 8-pin for VGA with waterproof cover and chain |
| Power | 1 x M12 3-pin for DC power connector with waterproof cover and chain |
| Storage Space | |
| HDD | 1 x 2.5" HDD or SSD space 1 x mSATA space |
| Movable Device | 1 x Internal SD Card |
| Expansion | |
| Expansion slot | 1 x Mini-PCIe (full size) |
| Display | |
| Display Type | 21.5" TFT-LCD |
| Max. Resolution | 1920 x 1080 |
| Max. Color | 16.7M |
| Luminance (cd/m ²) | 300 |
| View Angle | 178(H)/178(V) |
| Contrast | 3000:1 |
| Backlight Lifetime | 50,000 hrs |
| Touch Screen | |
| Type | Projected Capacitive Touch |
| Interface | USB |
| Light Transmission(%) | 90% |
| Power | |
| Power Input | DC 9~36V |
| Power Consumption | AEx-821P: 35W |
| Mechanical | |
| Construction | 316 stainless steel chassis |
| Mounting | VESA mount 100 x 100, Panel mount (option) |
| IP Rating | Total IP66 |
| Dimensions | 571 x 362 x 75.1 mm |
| Net Weight | 12.6 kg |

Dimensions

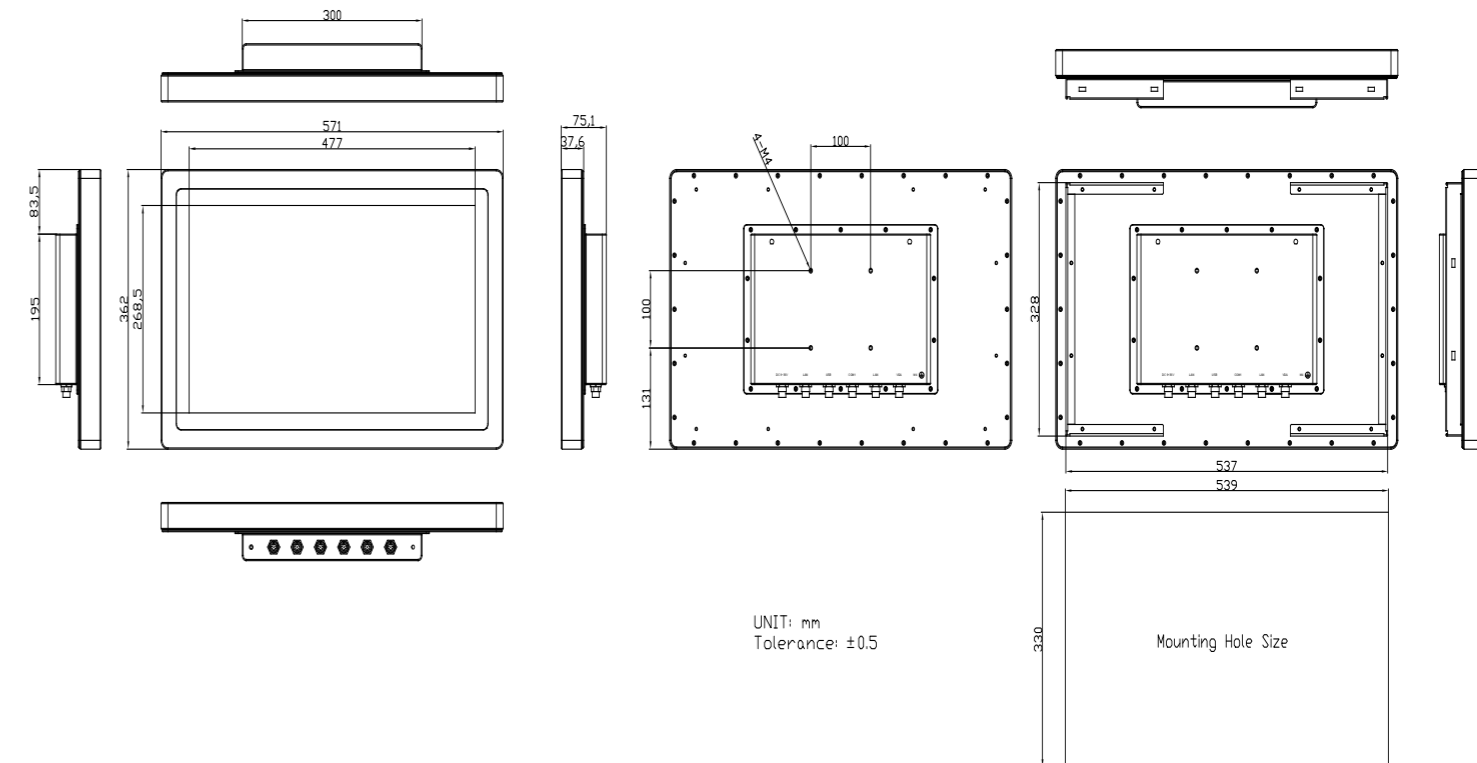

| Environmental | |
|--------------------------|--|
| Operating Temperature | -20~60°C |
| Storage Temperature | -30~70°C |
| Humidity | 10 to 95% @ 40°C, non- condensing |
| Safety | CSA C22.2 No.61010 |
| Certificate | CE / FCC Class A ATEX / IECEx Zone2 Ex ec ic IIC T4 Gc ATEX / IECEx Zone22 Ex tc IIIC T135°C Dc Class I, Division2, Group A,B,C,D,T4 Class II, Division2, Group F,G, T135°C Class III ANSI/ISA 12.12-01-2013 CSA Std., C22 No213-1987 |
| Operating System Support | |
| Windows embedded 7 | |
| Windows embedded 8.1 | |
| Windows 10 IoT ENT LTSB | |
| Ordering Information | |
| AEX-821P | 21.5" FHD IP66 Intel Celeron N2930 1.8G CPU fan less panel PC, 4GB DDR3L memory on board, 1 x 128GB 2.5" MLC SSD, 1 x 64GB mSATA MLC SSD, Projected capacitive touch, DC9~36V power input with power adapter, 316 stainless steel enclosure, support VESA Mount, WT-20~60 Accessory : 1 x M12 for 2 x USB2.0 Cable, 2 x M12 LAN cable, 1 x M12 COM Cable, 1 x VGA Cable, 1 x 3pin power input cable (w/o Adapter) |