


Features

- 15" Food Industrial Panel PC
- Intel Celeron N2930 Processor
- Onboard 4GB DDR3L 1333MHz
- Flat and Stainless Steel Front Panel Design
- Fanless Design
- Wide Range DC 9~36V Power Input

Specifications

System		
CPU	Onboard Intel Celeron N2930 Processor (2M Cache, 1.83GHz)	
System Chipset	SoC	
Memory	Onboard 4GB DDR3L SDRAM	
IO Port		
USB	2 x USB 3.0 type A	
Serial / Parallel	1 x RS-232/422/485 DB-9, default RS-232 (COM1) 1 x RS-232 DB-9 (COM2)	
LAN	2 x GbE LAN RJ-45	
Audio	1 x Line Out	
Power	1 x 3-pin Terminal Block Connector 1 x 2-pin Power Switch Connector	
Option	VESA Stand 4G LTE/WiFi/ BT 4 x USB 2.0 type A (TB-528U4) 4 x USB 2.0 type A + 1 x Mini-PCIe + 1 x SIM slot (TB-528U4ME1) 2 x COM (RS-232) (TB-528C2) 1 x COM (RS-232) + 2 x USB 2.0 (TB-528C1U2) 1 x COM (RS-232) + 2 x USB 2.0 + 1 x Power Button (TB-528C1U2P1) 2 x COM (RS-232) + 1 x Mini-PCIe slot + 1 x SIM slot (TB-528C2ME1) 2 x COM (RS-422/485, isolated) (TB-528C2I) 2 x CAN (TB-528CAN2) 1 x LAN + 2 x USB 2.0 type A (TB-528E1U2) 1 x LAN(25W isolated PoE PD) + 2 x USB 2.0 type A (TB-528E1U2POE)* 1 x LAN(45W isolated PoE PD) + 2 x USB 2.0 type A (TB528E1U2UPOE) Backup Battery 21W/10.8V/1.95Ah(3S1P) System is only allowed to build in either TB-528 PoE series or backup battery	
Storage Space		
HDD	1 x 2.5" SATA HDD space (Easily Accessible)	
Movable Device	1 x Internal Micro SD slot onboard	
Expansion		
On board expansion bus	1 x Mini-PCIe (full size) 1 x Micro SIM slot	
Display		
	Standard	High Brightness Optional
Display Type	15" TFT-LCD	15" TFT-LCD
Max. Resolution	1024 x 768	1024 x 768
Max. Color	16.2M	16.7M
Luminance (cd/m <sup>2</sup> )	300	1000
View Angle	176(H) /176(V)	176(H) /176(V)
Contrast	1000:1	800:1
Backlight Lifetime	70,000 hrs	70,000 hrs
Touch Screen		
Type	Projected Capacitive Touch (for AP model) Resistive Touch (for AR model)	
Interface	USB	
Light Transmission(%)	Resistive Touch: 80% Projected Capacitive: 90%	

Dimensions

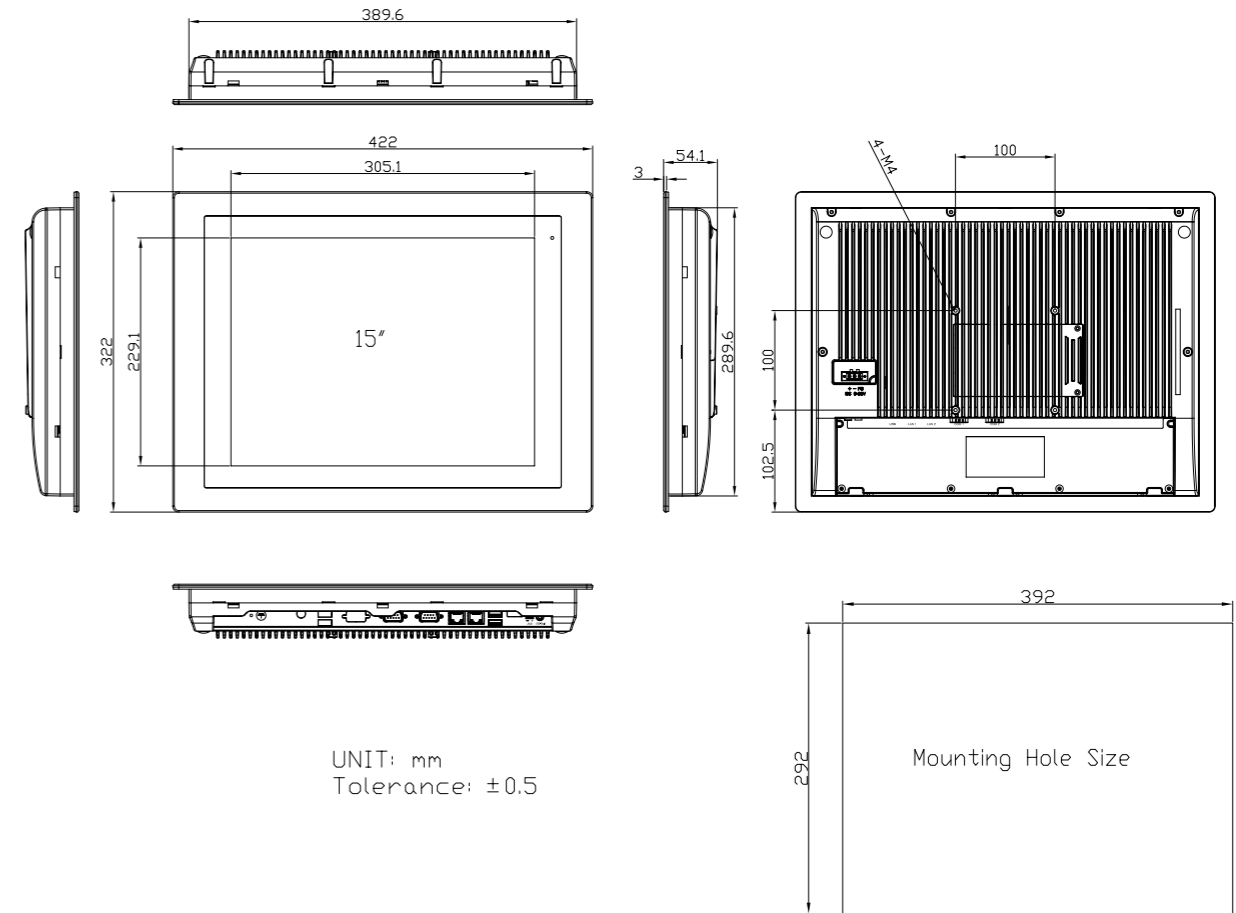

Power	
Power Input	DC 9~36V
Power Consumption	FABS-815P: 37W (MAX)
Mechanical	
Construction	304 Stainless Steel Front Bezel (default) 316 Stainless Steel Front Bezel (for option) Aluminum Die-casting Back Cover
Mounting	Panel Mount, VESA Mount 100 x 100
IP Rating	IP66/IP69K Compliant Front Bezel
Dimensions	422 x 322 x 54.1 mm
Net Weight	5.1 kg
Environmental	
Operating Temperature	0~50°C/ -20~60°C (option)
Storage Temperature	-30~70°C
Humidity	10 to 90% @ 40°C, non-condensing
Certificate	CE/FCC Class A EN 1672-2 for P Model
Operating System Support	
Windows 10 IoT	
Ordering Information	
FABS-815P/R (Barebone)	15" XGA fanless HMI barebone with Celeron N2930(1.83.GHz ) CPU, 4GB DDR3L RAM, Projected Capacitive/Resistive, 9~36VDC input with adapter, Stainless front bezel and Aluminum chassis.

\*PoE limitation: CPU turbo off, rear I/O no loading, 70% LED backlight, PSE cable length < 50m