

# FSP5560-6G-N4200

## 55-inch Industrial IP66 Waterproof Stainless Steel Panel PC

### Features

- 55" TFT LCD Monitor with Resolution up to 3840x2160
- Built-in Intel® Pentium Processor, Celeron, Atom and Core i3/i5 Processor is Available for Option
- IP66/NEMA4X Waterproof, Stainless Steel Housing
- 2500nits High Brightness for Sunlight Readable (Optional)  
Surface Liquid Crystal Support Wide Temperature -20~+110°C



### SPECIFICATION

Display	Size/Panel Type	55" TFT LCD Panel
	Resolution	3840x2160
	Brightness (cd/m <sup>2</sup> )	500cd/m <sup>2</sup> (Optional: 2500cd/m <sup>2</sup> , 1920x1080)
	Contrast Ratio	4000:1
	Response Time	6.5ms
	Backlight	LED backlight unit
	Colors	16.7M Colors
	Viewing Angle (H/V)	178°/178°
Cover Lens	Cover Lens Type	Tempered Glass (Optional: PCAP Touch/IR Touch)
	Surface Hardness	7H
Environment	Operating Temperature	0°~50°C
	Storage Temperature	-20°C ~ +60°C
	Humidity	10%~90% RH(Non-Condensing)
	Waterproof Rating	IP66/NEMA4X, 6 Side Waterproof
Power	Power Input	AC100~240V Input
	Power Consumption	160W
Mechanical	Mounting	VESA 500 x 200mm; 500 x 400mm
	Dimension/Weight	1313mm (W) x 784mm (H) x 96mm (D)/64kgs
	Housing Material / Color	Stainless Steel / Silver
System	Processor/Memory	Intel Pentium N4200 Processor / 4GB DDR3L
	I/O Interface	LAN x 1, USB x 1, COM x 1, Power in x 1
	Certification	FCC/CE/RoHS Compliance

Specifications subject to change without notice

### ORDERING CODE

FSP5560-6X-XXXX-N4200

G = Tempered Glass

P = P-CAP Touch Screen


I = IR Touch Screen

-H25 = 2500nits High Brightness

-W = Wide Temperature, -20°~+50°C

### ACCESSORIES

- LAN Cable x 1 (5M)
- RS232 Cable x 1 (5M)
- Power Cable x 1 (5M)

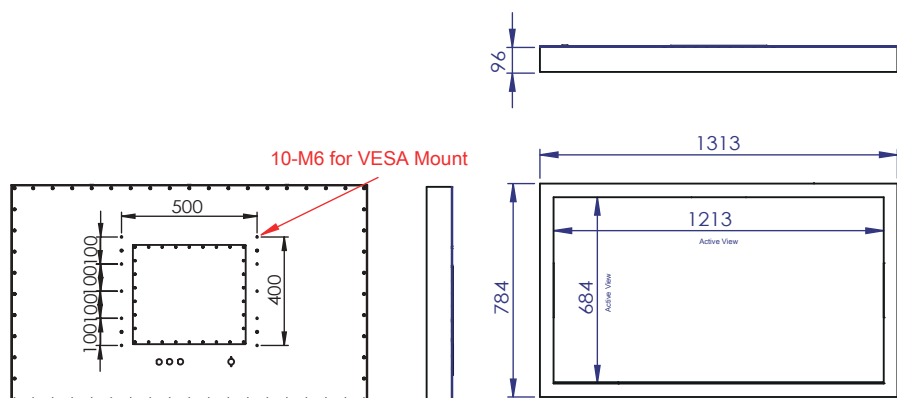

Unit:mm