

NPD0835

8.4" IP68 & IP65 Sunlight Readable Marine Display

NAVPIXEL NPD0835, the high-performance, rugged touch monitor, is specially engineered to survive from the most demanding working environment. Housed in a milled billet aluminum case, the slim-profile NAVPIXEL NPD0835 is light weight and watertight. The front-mounted sunlight readable touch screen makes the industrial rugged monitor vividly and user-friendly. In addition, the high power efficiency and low heat design guarantee the stability and longevity required for mission critical deployment.

Features:

- 1000 nits Sunlight Readable LCD
- Long Life, Low Power Consumption LED Backlight
- Wide Operating Temperature
- Advanced Optical Bonding (AOT)
- High Shock & Vibration Resistance
- IR Touch Support (front IP65 design)
- AR glass support (IP68 design)
- 9-36V DC Input

Application:

Marine



Specifications V1		
Model Number	NPD0835	
Description	8.4" IP68 Sunlight Readable Marine Display	
Backlight	LED Backlight	
Active Display Area	170.4 x 127.8mm	
Brightness	1000 cd/m ²	
Resolution	800x600(SVGA)	
Contrast Ratio	450:1	
Pixel Pitch (mm)	0.213(H) x 0.213 (V)	
Viewing Angle	130 (H), 115(V)	
Display Color	16.2M	
Response Time	35ms	
Inputs	VGAx1	
PIP Support	NA	
Mechanical		
IP Rating	Waterproof IP68 & IP65 standards	
Construction	Rugged Aluminum Alloy Chassis	
Mounting	VESA mount	
Dimension	250(W)x200(H)x64(D)	
Net Weight	3Kg	
Power		
Voltage	DC Input Voltage: DC 9~36V	
Power Consumption	9.5W	
Environmental		
Operating Temperature	-20°C~60°C	
Non-Operating Temperature	-30°C~75°C	
Certification	CE / FCC	
Marine Type Approval	BV Rule IACES-E10 certification, comply with IEC 60945	

Specifications are subject to change without notice.


All brands or product names are trademarks or registered trademarks of their respective companies.

2017/6/19 1



Mechanical Drawing

Outline Dimensions Unit:mm

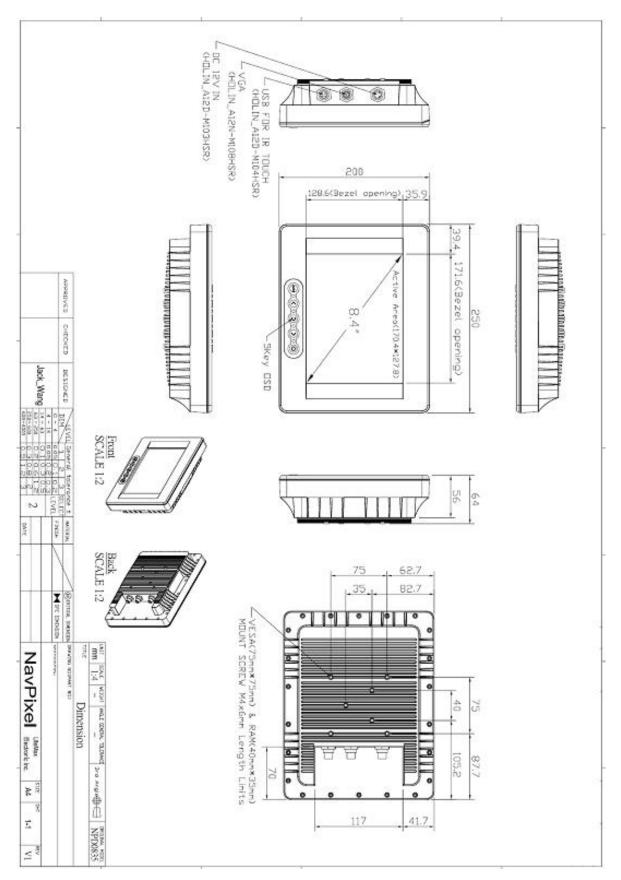

2 2017/6/19



Ordering Information		
Description		
8.4",1000nits,SVGA,LID08A05.O/F,AR Glass,AD5621G,WP,AOT.P,V02		
8.4",1000nits,SVGA,T/IR-USB.LID08A05,O/F,AD5621G,WP.AOT,V02		
8.4",1000nits,SVGA,Touch-usb.LID08A05,AD5621G,O/F,WP.AOT,Carton w/o logo,V02		

Optional Accessories		
Part Number	Description	
840612051103	ADAPTER,12V,5A,60W.KPA-060F,DC Plug,2.1*5.5mm.P	
810118301000	CABLE,VGA,1830mm.D-SUB15P MALE TO HOLIN FEMALE.8P,WATERPROOF,P	
810518301000	CABLE,OTHER,USB.USB A TYPE MALE TO HOLIN.FEMALE 4P,WATERPROOF,P	
810618301000	CABLE,POWER,DC,1830mm.DC JACK TO HOLIN FEMAL 3P.WATERPROOF,P	
810618301010	CABLE.POWER.AC.1830mm USA type	
810618301090	CABLE,POWER,AC,1830mm Europe type	
810618301050	CABLE.POWER.AC.1830mm UK type	
810618301170	CABLE.POWER,AC,1830mm Australia type	
810618301030	CABLE.POWER.AC.1830mm Japan type	

3 2017/6/19