

TKS-088c-TB38-MODUL



FEATURES

- Panel mount version with reserve side threaded bolts
- Excellent tactile feedback
- Haptic printing
- Integrated 38-mm trackball
- Chemical, abrasion and scratch resistant frontsheet
- Resistant against dirt, dust and liquids (IP65)

TECHNICAL DATA

Number of keys:	88	Storage temperature:	-25 °C to +80 °C
Mounting type:	front panel with threaded bolts	Dimensions:	370 x 180 x 56 mm
Front panel material:	aluminium	Compliance:	-- Global: REACH, RohS self-declaration
Keyswitch technology:	short travel keys	Weight:	1100 g
Switching cycles:	approx. 3 mill. (per key)		
Operating force:	2.6 N		
Switch travel:	0.3 mm		
Protection level:	IP65 static, IP54 dynamic		
Interfaces:	USB		
USB compatibility:	USB V1.1 compliance		
Operating temperature:	0 °C to +70 °C		

TECHNICAL DATA TRACKBALL


Ball diameter:	38 mm
Ball material:	phenolic resin
Operating principle:	mechanical

Cat.No.	Product description	Interface	Layout
KS18292	TKS-088c-TB38-MODUL-USB-DE	USB	German
KS18293	TKS-088c-TB38-MODUL-USB-US	USB	US

Other language versions/interfaces/configurations available on request.

Subject to modifications and errors

TECHNICAL DRAWING (in mm)

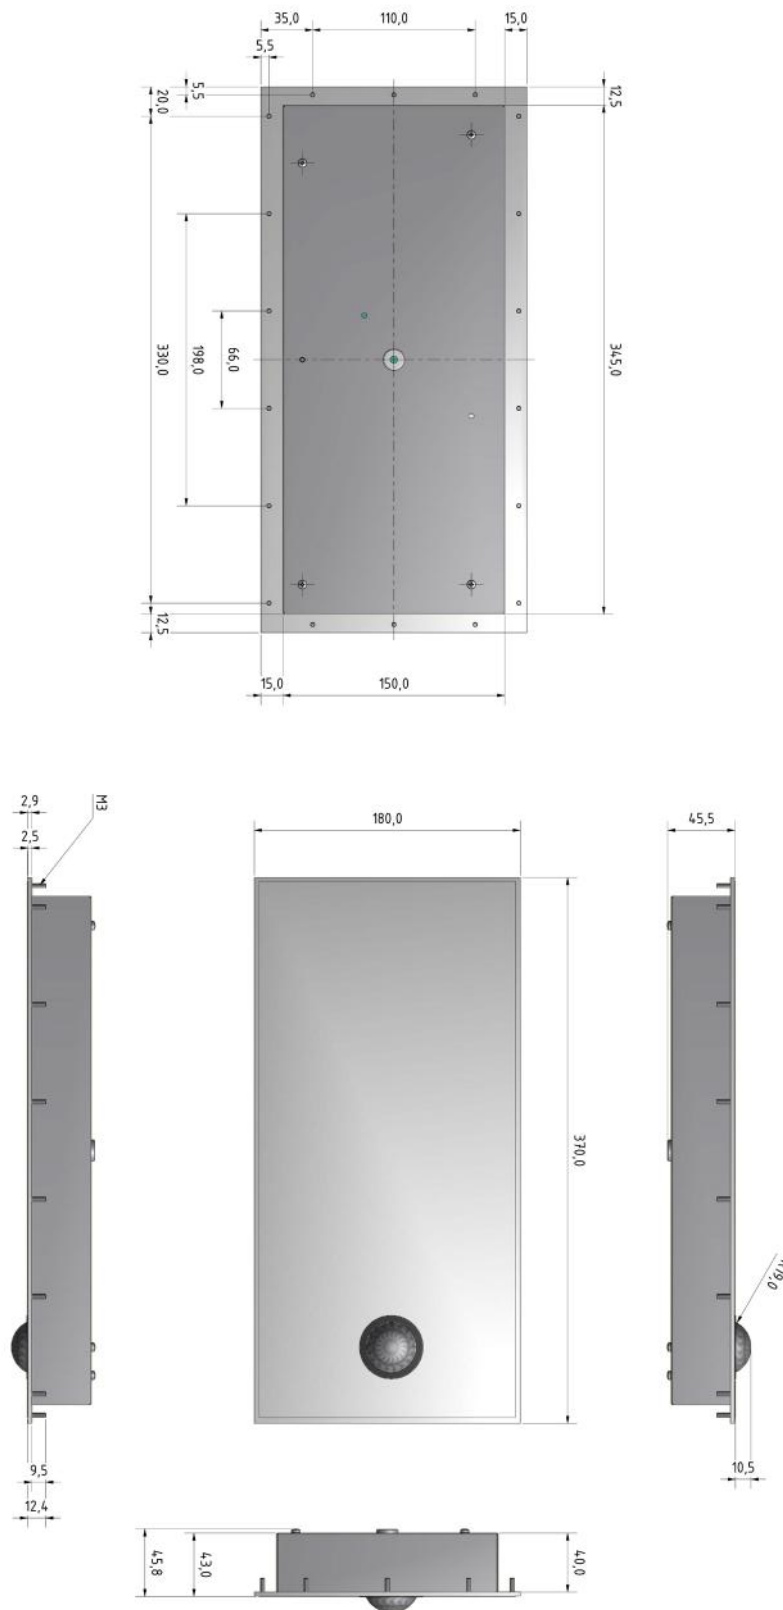

Subject to modifications and errors

GETT Gerätetechnik GmbH

Mittlerer Ring 1 | 08233 Treuen | Germany
Tel: +49 37468 660-0
Fax: +49 37468 660-66
E-Mail: info@gett.de
Internet: www.gett.de

Gett North America LLC

E-Mail: info@gett-na.com
Internet: www.gett-na.com

Gett Asia Ltd.

E-Mail: info@gett-asia.com
Internet: www.gett-asia.com